


CLADEO 300

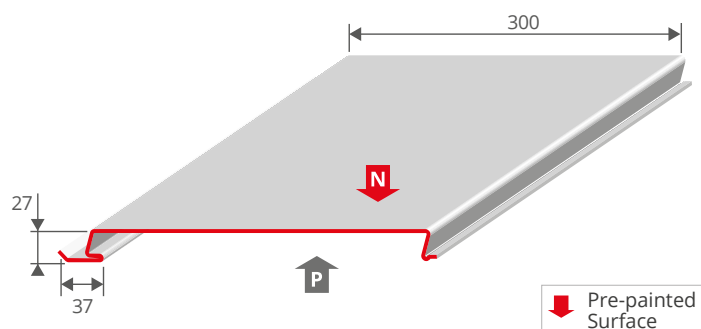

THICKNESS mm	WEIGHT kg/m ²
1.00	10.62

STANDARD COATINGS >

Steel S 320 GD	Thickness mm	Standards
Polyester 25μ or 35 μm	1.00	NF EN 10169 / NF P 34-301
Other coatings	on request	

**BUREAU
VERITAS**

TEST REPORT > NO. 1841430/1A

Deflection tests according to NF P 34-503 of November 1995.
Professional rules for the manufacture and installation of metal cladding (January 1981 - 2nd edition)

COATING OPTIONS ON REQUEST >

- Post-painted coating
- Vinyl self-adhesive

MAXIMUM LENGTH > 8,00 metres

LOAD TABLE IN daN/m² ACCORDING TO USE SPANS > fy: 320MPa - nominal thicknesses in mm

PRESSURE		USE SPANS m	DEPRESSION	
1.00	1.00		1.00	1.00
		1.20	120	
		1.30	102	133
253		1.40	98	119
210	389	1.50	94	109
177	331	1.60	91	99
151	284	1.70	88	92
130	246	1.80	84	85
113	215	1.90	82	79
99	190	2.00	79	74
87	168	2.10	72	69
77	150	2.20	65	65
69	135	2.30	60	62
62	122	2.40	55	58
56	110	2.50	50	55
50	100	2.60	47	53
46	92	2.70	43	50
	84	2.80		48
	77	2.90		46
	71	3.00		44

N.B. >

The profiles are delivered with a protective plastic film.

This film should be removed when the profiles are being installed or, failing that, within 10 days of installation.