


FACADEO 1100

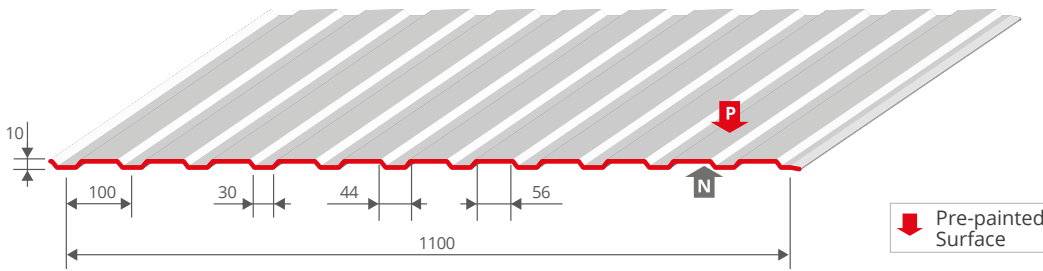

THICKNESS mm	WEIGHT kg/m ²
0.63	5.49
0.75	6.53

STANDARD COATINGS >

Steel S 320 GD	Thickness mm	Standards
Galva	0.63/0.75	NF EN 10346 / NF P 34-310
Polyester 25μ/35μ	0.63/0.75	NF EN 10169 / NF P 34-301
Other coatings	on request	NF EN 10169 / NF P 34-301

**BUREAU
VERITAS**

TEST REPORT > NO. 1678830/1C

Deflection tests according to NF P 34-503 of November 1995.
Professional rules for the manufacture and installation of metal cladding (January 1981 - 2nd edition)

LOAD TABLE IN daN/m² ACCORDING TO USE SPANS > fy: 320MPa - nominal thicknesses in mm

PRESSURE				USE SPANS m	DEPRESSION				
0.63	0.75	0.63	0.75		0.63	0.75	0.63	0.75	
142				0.90	127				
120	143			0.95	116	138			
102	121	174		1.00	107	127	146		
87	104	151	179	1.05	98	117	131	156	
75	90	131	156	1.10	90	108	118	141	
65	78	115	137	1.15	84	99	107	128	
57	68	101	121	1.20	78	92	98	116	
49	59	90	107	1.25	68	81	89	106	
43	51	80	95	1.30	60	72	82	98	
37	44	72	85	1.35	54	64	74	88	
32	39	64	77	1.40	48	57	67	80	
		58	69	1.45			61	73	
		53	63	1.50			56	66	
		48	57	1.55			51	61	
		44	52	1.60			47	56	
		40	48	1.65			43	52	
		37	44	1.70			40	48	
		34	40	1.75			37	44	
		31	37	1.80			34	41	