


FACADEO 5.35

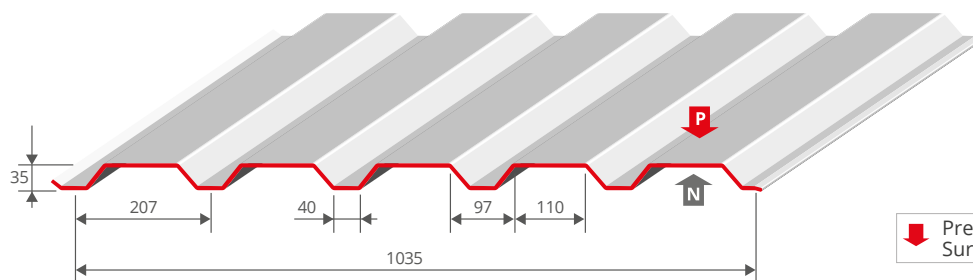

Pre-painted Surface

THICKNESS mm	WEIGHT kg/m ²
0.63	5.83
0.75	6.94

STANDARD COATINGS >

Steel S 350 GD	Thickness mm	Standards
Galva	0.63/0.75	NF EN 10346 / NF P 34-310
Polyester 25μ/35μ	0.63/0.75	NF EN 10169 / NF P 34-301
Other coatings	on request	NF EN 10169 / NF P 34-301

BUREAU
VERITAS

TEST REPORT > NO. 1702353/1C

Deflection tests according to NF P 34-503 of November 1995.
Professional rules for the manufacture and installation of metal cladding (January 1981 - 2nd edition)

LOAD TABLE IN daN/m² ACCORDING TO USE SPANS > fy: 350MPa - nominal thicknesses in mm

PRESSURE				USE SPANS m	DEPRESSION			
0.63	0.75	0.63	0.75		0.63	0.75	0.63	0.75
206				1.70	257			
178	211			1.80	218	259		
155	184			1.90	185	221		
136	162	180		2.00	159	190	229	
129	143	163	194	2.10	138	164	207	247
107	127	148	177	2.20	120	143	189	225
95	114	135	160	2.30	106	126	172	204
86	102	123	146	2.40	93	111	157	186
77	92	112	133	2.50	83	98	143	171
69	83	103	122	2.60	75	89	132	157
62	74	94	112	2.70	68	81	121	144
56	67	87	104	2.80	62	73	112	133
51	61	81	97	2.90	56	67	104	124
47	55	76	91	3.00	52	62	97	116
43	51	71	85	3.10	48	57	91	109
39	46	67	80	3.20	44	52	86	102
		63	75	3.30			80	95
		60	71	3.40			74	89
		56	67	3.50			69	82
		53	64	3.60			65	77
		51	60	3.70			60	72
		48	57	3.80			56	67
		46	54	3.90			53	63
		43	52	4.00			50	59