



SINUS 25B

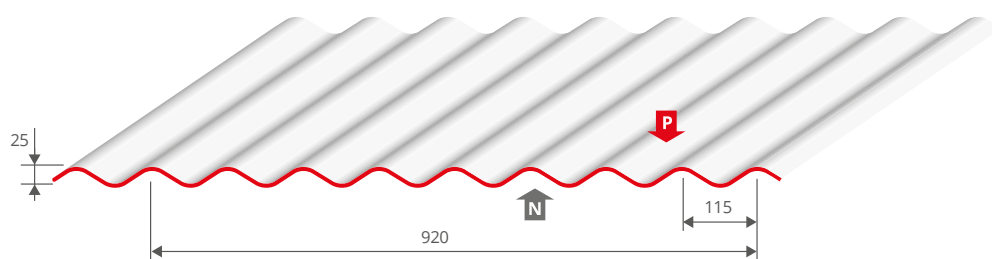

THICKNESS mm	WEIGHT kg/m ²
0.63	6.56
0.75	7.81

Pre-painted Surface

STANDARD COATINGS >

Steel S 320 GD	Thickness mm	Standards
Galva	0.63/0.75	NF EN 10346 / NF P 34-310
Polyester 25μ/35μ	0.63/0.75	NF EN 10169 / NF P 34-301
Other coatings	on request	NF EN 10169 / NF P 34-301

**BUREAU
VERITAS**

TEST REPORT > NO. 1942358/1A

Deflection tests according to NF P 34-503 of November 1995.
Professional rules for the manufacture and installation of metal cladding (January 1981 - 2nd edition)

LOAD TABLE IN daN/m² ACCORDING TO USE SPANS > fy: 320MPa - nominal thicknesses in mm

PRESSURE				USE SPANS m	DEPRESSION			
0.63	0.75	0.63	0.75		0.63	0.75	0.63	0.75
215		284		1.30	208		228	
173	206	235	280	1.40	167	199	208	247
142	169	197	234	1.50	136	162	191	227
118	140	167	199	1.60	112	133	165	197
99	118	144	171	1.70	94	111	143	171
84	100	124	148	1.80	79	94	125	149
72	86	109	129	1.90	68	81	110	131
63	75	96	114	2.00	59	70	98	117
55	66	85	101	2.10	51	61	88	104
49	58	76	90	2.20	45	53	79	94
43	51	68	81	2.30	39	47	71	85
38	46	62	74	2.40	35	42	64	77
		57	68	2.50			58	70
		53	63	2.60			53	64
		49	58	2.70			49	58
		45	54	2.80			45	54
		42	50	2.90			42	49