



# BACACIER®

## Tuile<sup>r</sup> PRO REPOSITIONABLE TILE SHEET


Interlocking and **no need to cut**  
**Light and easy** to handle  
**Complete solution** with fittings  
**Premium colours** quartz matt textured

TUILE R PRO® is the ideal solution for all your roof construction and renovation work. Thanks to its **patented design**, TUILE R PRO® does **not need to be cut**. The 1m² panels made up of **48 tiles interlock** with each other, both widthways and lengthways, to **adapt to all your projects**. All the required fittings are also available, with the same finish in order to render a professional quality.



### CHARACTERISTICS

Coating:	Polyester 45µm
Material:	Pre painted galvanised steel
Thickness:	0.50 mm
Usefull width :	870 mm
Usefull length:	From 1150 to 3029 mm at intervals of 143 mm
Weight :	5.31 kg / m²
Minimal slope :	23%
Colours :	RED 8004 - GRAPHITE 7016

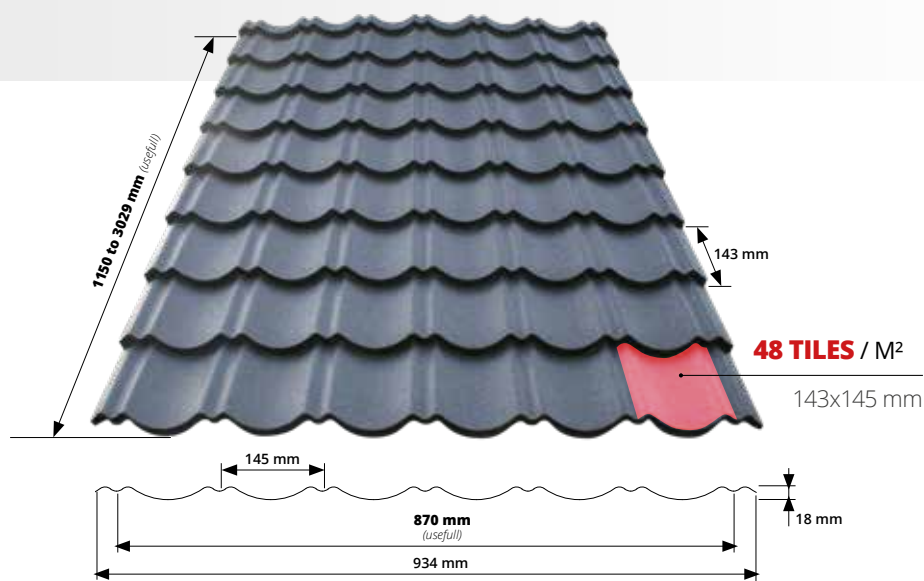

\* Subject to validation after environmental investigation

09/2018



**BACACIER®** at your service

Tel. : 01 84 16 67 17

Monday to Friday  
from 8.00 a.m. to 12.00 p.m. and  
from 2.00 p.m. to 6.00 p.m.

Email : [open@bacacier.com](mailto:open@bacacier.com)

24/7

Find out more :  
[www.bacacier.com](http://www.bacacier.com)



Installation video



Installation guide



Technical data sheet




Calculation note

## SUITABLE FOR ALL YOUR ROOFS **WITHOUT CUTTING**



### COMPLETE DESIGN

A ready-to-install turnkey solution including all the accessories and fasteners

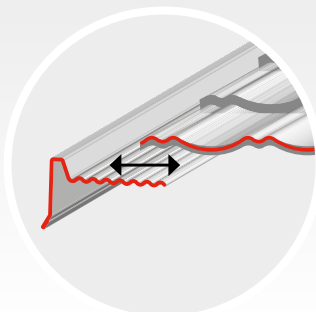

### ADJUSTABLE

Toothed corrugated edge flashing that can be adjusted without cutting



### INTERLOCKING

Interlocking tile panels at the top and on the sides for easy installation and no need for cutting



### COLOURS

Available in two exclusive colours: matt textured quartz

## FLASHINGS AND TRIMS

Thickness 0.50mm, pre-painted polyester 45µm  
Standard lengths 2000



Corrugated single edge



Headwall edge



Headwall drainage strip



Overlapping edge



Ridge strip



Headwall counter flashing



Double ridge cap



Single slope ridge cap



Inclined ridge



Gutter strip



Inverted ridge

## ACCESSORIES



Fixings  
Pouch with 50 screws  
4.9\*35mm




Pipeco




Flat sheet  
1000 x 2000mm

## COMPATIBLE WITH ALL SUPPORTS



INSTALLING ON **DECKING**  
Provide a roof underlay



INSTALLING ON **BATTENS**  
Provide a roof underlay



INSTALLING ON **SHINGLES**

MINIMUM SLOPE **23%**



**BACACIER®** at your service

Tel. : **01 84 16 67 17**

Monday to Friday  
from 8.00 a.m. to 12.00 p.m. and  
from 2.00 p.m. to 6.00 p.m.

Email : **open@bacacier.com**

24/7

Find out more :  
**www.bacacier.com**



Installation video



Installation guide



Technical data sheet



Calculation note